

## LED T8 Tube - 4FT



**Application:** Supermarket / subway/ office / shopping mall / hotel/ hospital / school / showrooms ...



### FEATURE

- Aluminum housing, Suitable for damp location; Working temperature: - 4°F ~+104°F / -20°C ~+40°C
- Beam Angle: 180°; CRI>80; PF>0.9
- High energy efficiency: save more than 60% energy versus T8 fluorescent lamps and Lumen Maintenance over 70% @ 50,000+ Hours
- RoHS Compliant - Mercury Free: eliminate disposal problems
- Ballast Bypass: Wire to mains for easy and quick installation and eliminate ballast maintenance cost

### SPECIFICATION

Model	Length	Watt	CCT	Lumens	Base	Cover	Voltage
TCL-T8-18P4FT-B4000K (F)	4ft	18W	4000K	2340 lm	G13	Frosted	120-277V
TCL-T8-18P4FT-B5000K (F)	4ft	18W	5000K	2340 lm	G13	Frosted	120-277V
TCL-T8-18P4FT-B5000K (T)	4ft	18W	5000K	2340 lm	G13	Clear	120-277V
TCL-T8-18P4FT-B6500K (T)	4ft	18W	6500K	2340 lm	G13	Clear	120-277V
TCL-T8-20P4FT-B6500K (T)	4ft	20W	6500K	2600 lm	G13	Clear	120-277V

### INSTALLATION

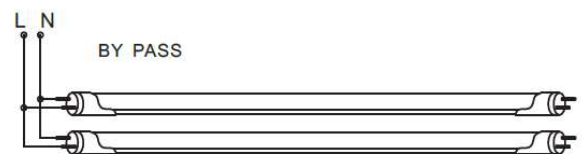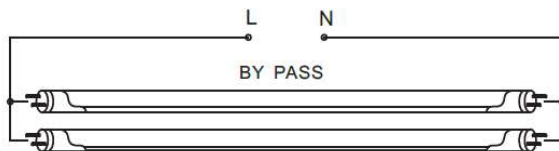

### PACKAGE INFO

Length	QTY/PACK	PACKAGE SIZE	PACKAGE WEIGHT	PACKAGE CBM	40HQ Capacity
4ft	25 PCS/PACK	1245X190X170mm 49.02"X7.48"X6.69"	7.44kg/16.4 lbs	0.040214	~42250PCS